

## SPECIFICATIONS ADiva SE with TR-3D

### Frequency Response:

On wall or floor stand: 80Hz to 22Khz

Isolation ring or table stand: 100Hz to 22Khz

**Sensitivity:** 88 dB/w 2.8v (1M)

**Nominal Impedance:** 4 Ohms

### Power Handling

Full Range: 60 watts

Crossover: 125 watts

**Height on floor stand:** 977 mm / 38.4"

**Driver:** 3" wide-dispersion flat diaphragm


Crossover: None

**Dimensions:** 5" Sphere

**Weight:** 963g

**Cone material:** Aluminium Honeycomb Sandwich

**Warranty:** 5 years parts and labour

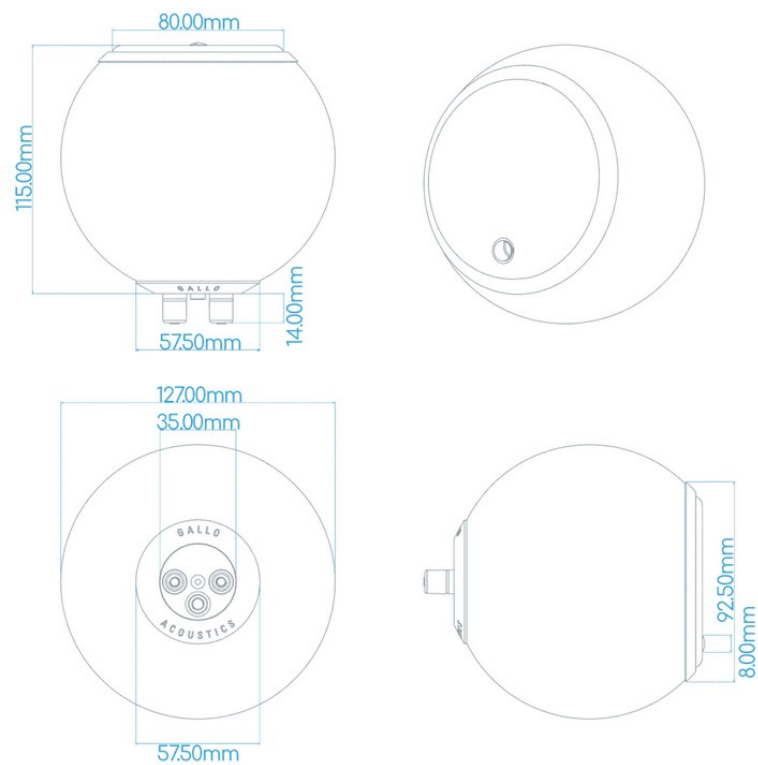

<b>In-room frequency response</b>	18Hz - 180Hz +/- 3db
<b>Digital power amp</b>	300 Watts RMS, 600 Watts max.
<b>Phase</b>	0/180 switch
<b>Low pass</b>	50 to 180Hz, continuously variable with LFE by-pass switch
<b>High pass</b>	100Hz fixed, 1st order on high-level output
<b>Bass EQ</b>	0, +3dB, +6dB 25 Hz center frequency
<b>Power</b>	Auto/On/Off: toggle Switch
<b>Dimensions:</b>	275mm (W) x 305mm (H) x 345mm (D)
<b>Enclosure type</b>	Hardened steel with S2 Bass loading
<b>Connections</b>	2 female RCA phono inputs and 2 female RCA phono outputs (pass-thru) 5-way gold plated binding posts
<b>Woofer</b>	10" long throw ceramic coated aluminum
<b>Warranty</b>	2 Years Parts and Labour

