

SPECIFICATIONS Adiva and TR-3D

Frequency Response:

On wall	76Hz to 20Khz
On floor stand	95Hz to 20Khz

Sensitivity: 88 dB/w

Nominal Impedance: 8 Ohms

Power Handling:

Full range	50 Watts
Crossover	100 Watts

Height on Floor Stand 977 mm / 38.4"

Driver: 3" full range

Crossover None


Dimensions: 5" Sphere

Weight: 1.6kg

Cone Material: Mical Polypropylene Compound

Enclosure Material: Mild Steel

Warranty: 5 Years Parts and Labour

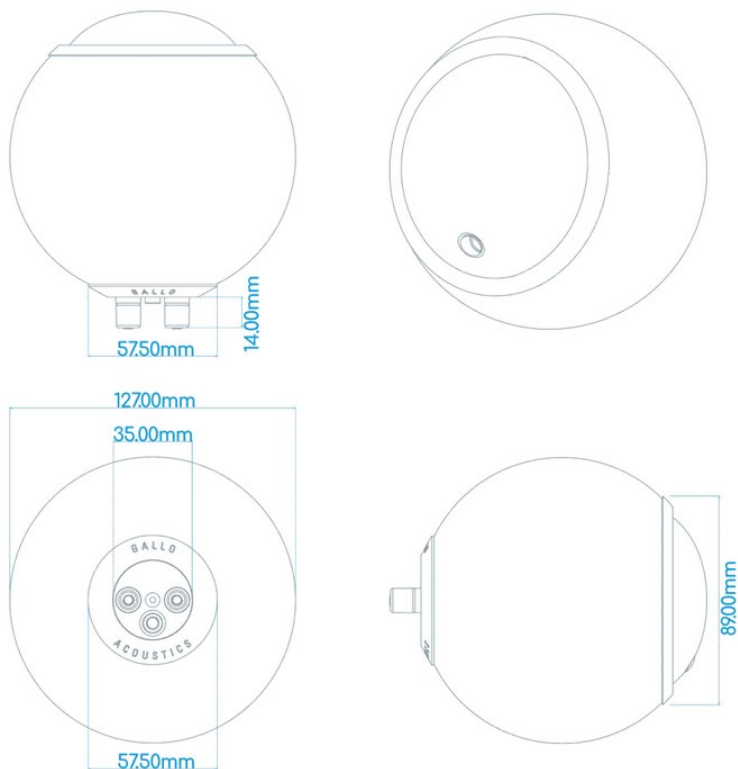

In-room frequency response	18Hz – 180Hz +/- 3db
Digital power amp	300 Watts RMS, 600 Watts max.
Phase	0/180 switch
Low pass	50 to 180Hz, continuously variable with LFE by-pass switch
High pass	100Hz fixed, 1st order on high-level output
Bass EQ	0, +3dB, +6dB 25 Hz center frequency
Power	Auto/On/Off: toggle Switch
Dimensions:	275mm (W) x 305mm (H) x 345mm (D)
Enclosure type	Hardened steel with S2 Bass loading
Connections	2 female RCA phono inputs and 2 female RCA phono outputs (pass-thru) 5-way gold plated binding posts
Woofers	10" long throw ceramic coated aluminum
Warranty	2 Years Parts and Labour

