


SPECIFICATIONS STRADA

Frequency Response	68Hz to 20hz +/- 3db (in room with boundary reinforcement, speakers within 1 foot of wall)
Sensitivity	90 dB/1 Watt/1 meter
Nominal Impedance	8 Ohms
Power Handling	150 Watts RMS unclipped music power. Minimum suggested power 10 Watts RMS.
Finishes	Brushed stainless steel spheres with a black frame.
Tweeter	Patented CDT3 (Cylindrical Diaphragm Transducer) sporting 180° horizontal dispersion from 6kHz to above 20kHz.
Woofers	Two 4" dynamic hyperbolic carbon fibre drivers optimised to integrate seamlessly with the CDT3 tweeter without the need for a crossover.
Crossovers	None
Enclosure Type	Sealed with Auxiliary Bass Cavity Supplementation and Patented S2 loading.
Dimensions	127mm (W) x 343mm (H) x 191mm (D)
Weight	5.2kg
Connections	5 way gold plated binding posts.
Enclosure Material	Powder coated cast aluminium chassis with brushed stainless steel spheres and powder coated stainless steel grilles.
Warranty	5 Years Parts and Labour

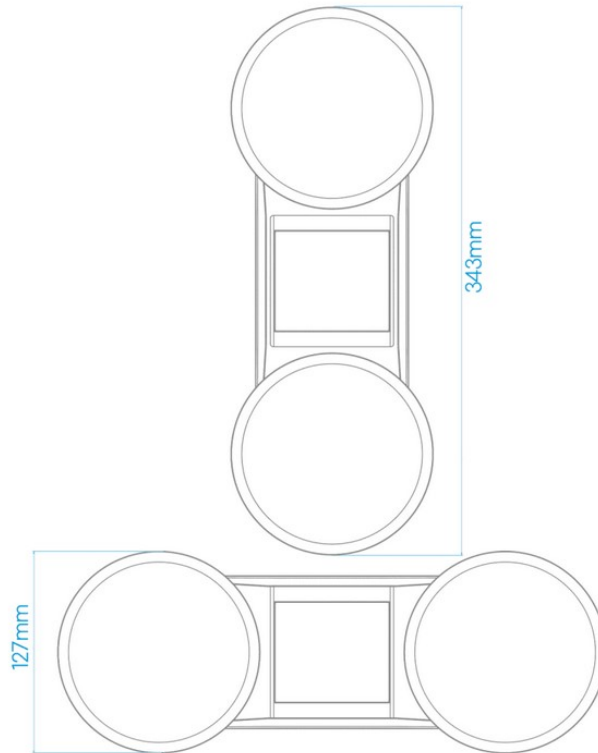

SPECIFICATIONS TR-3D

In-room frequency response	18Hz - 180Hz +/- 3db
Digital power amp	300 Watts RMS, 600 Watts max.
Phase	0/180 switch
Low pass	50 to 180Hz, continuously variable with LFE by-pass switch
High pass	100Hz fixed, 1st order on high-level output
Bass EQ	0, +3dB, +6dB 25 Hz center frequency
Power	Auto/On/Off: toggle Switch
Dimensions:	275mm (W) x 305mm (H) x 345mm (D)
Enclosure type	Hardened steel with S2 Bass loading
Connections	2 female RCA phono inputs and 2 female RCA phono outputs (pass-thru) 5-way gold plated binding posts
Woofer	10" long throw ceramic coated aluminum
Warranty	2 Years Parts and Labour

